

Contents

1. Welcome
2. Your Digit-X
 - 2.1. Overview
 - 2.2. Further Help
3. Preparing for Use
 - 3.1. Before you Get Started
 - 3.2. In your Carry Case
4. Setting up the Device
 - 4.1. Indicators on the Device
 - 4.2. Step 1: Fitting the Battery
 - 4.3. Step 2: Taking a Measurement
 - 4.4. Step 3: Zeroing Procedure
 - 4.5. Step 4: Obtaining an
Optical Density Measurement
5. Taking Care of your Digit-X
6. Troubleshooting, Hints and Tips
7. Calibration and Repair
8. Technical Specification
9. Calibration Certificate



Contents

1. Welcome
2. Your Digit-X
 - 2.1. Overview
 - 2.2. Further Help
3. Preparing for Use
 - 3.1. Before you Get Started
 - 3.2. In your Carry Case
4. Setting up the Device
 - 4.1. Indicators on the Device
 - 4.2. Step 1: Fitting the Battery
 - 4.3. Step 2: Taking a Measurement
 - 4.4. Step 3: Zeroing Procedure
 - 4.5. Step 4: Obtaining an
Optical Density Measurement
5. Taking Care of your Digit-X
6. Troubleshooting, Hints and Tips
7. Calibration and Repair
8. Technical Specification
9. Calibration Certificate

Welcome

1

Xograph Healthcare is an independent, specialist organisation supplying innovative healthcare and veterinary products and services to the UK and Republic of Ireland. Established in 1967, we have developed our core business to become a respected, specialist integrator of diagnostic imaging solutions.

Working closely with our corporate partners, we continue to ensure that the latest and most cost-effective technologies are available to all our customers as 'best of breed' and bespoke 'systems for life'.

Your Digit-X

2.1. Overview

The Digit-X is a portable, compact, high quality device for carrying out your X-ray film processor quality assurance programme.

It is a unique hand-held transmission densitometer combining ease of use with high accuracy and repeatability. The fine fibre-optic probe allows small areas of film to be measured accurately with the reading being displayed on the large clear LCS panel to two decimal places. Battery power means that the Digit-X is not limited in its areas of operation and it is so light – just 175g – that carrying it from place to place is extremely practical.

Battery usage is minimal and a low battery warning indicator is provided on the digital display. A version is available with an illuminated display.

This manual is intended to provide basic information to help you understand how to successfully put your device into operation and how to operate it in daily use.

2.2. Further Help

Along with this product, you are entitled to telephone support from Xograph Healthcare's Technical Support Department, who will be happy to assist you with any questions that you may have.

Our contact details are on the back cover of this booklet.

Latest information on our products is also on our website. (See back cover for contact details).

Preparing for Use

3.1. Before you Get Started

When you unpack your Digit-X check that you have all of the individual parts that are mentioned in section 3.2. Inspect for any damage that could have occurred during transportation, making sure that the delivery agrees with the delivery note. If you should discover any problems please contact Xograph Head Office where a member of the team will be happy to assist you. (See back cover for details).

3.2. In your Carry Case

- Densitometer
- 1 Battery
- User Manual



Setting up the Device

4

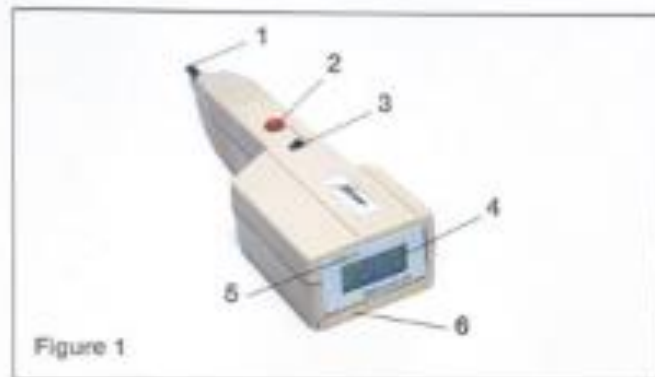


Figure 1

4.1. Indicators on the Device

- | | |
|---------------------|----------------------------|
| 1 Fibre-Optic Probe | 4 Digital Density Read-Out |
| 2 Zeroing Button | 5 Battery Low Indicator |
| 3 On/Off Switch | 6 Battery Compartment |

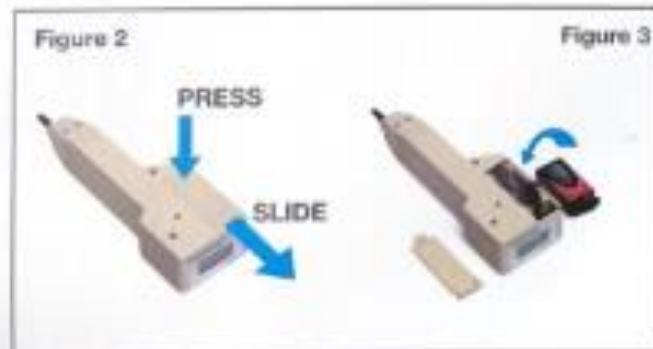


Figure 2

Figure 3

4.2. Step 1: Fitting the Battery

Before use, it is necessary to fit the battery provided. Slide back the battery case cover located on the underside of the unit. Attach and insert the 9 volt battery and close the cover, see figures 2 and 3.

4.3. Step 2: Taking a Measurement

Switch the device on, a digital readout will be displayed. Before a measurement can be taken it is essential to zero the unit using the zeroing button. It is assumed that the viewing box has been switched on for long enough to have reached a stable light output.

4.4. Step 3: Zeroing Procedure

Select an area of the viewing box that corresponds to the location on the film that you wish to measure. Remove the film from the viewing box and place the probe tip of the Digit-X against the light source at your chosen location and apply slight forward pressure. It is essential that the unit is kept at right angles to the light source at all times during measurement.

Remove the probe tip from the light source and then press the zero button. Your Digit-X is now zeroed and the display reads 0.00, see figure 4.



Figure 4

4.5. Step 4: Obtaining an Optical Density Measurement

Replace the film on the light box and position the area you wish to measure over the same point on the light source to ensure the validity of the zero point, apply slight forward pressure with the tip of the Digit-X on the surface of the film and then release the pressure, see figure 4. It is essential that the unit is kept at right angles to the light source at all times during measurement. The density reading of the film, including the base fog, is now displayed on the Digit-X.


Re-zeroing is not necessary for further readings on the same film provided that the measurements are taken at the same point used for zeroing, however re-zeroing is recommended when measuring a new film or after two minutes of use. The Digit-X is a stable device but typically there are significant variations in light box output with time and in the light levels across a box.

Important: All subsequent readings MUST be made on the same point of the viewer where the Digit-X was last zeroed.

5. Taking Care of your Digit-X

After use it is recommended that you switch the Digit-X off and store in the protective case provided.

Low Battery - A battery symbol will appear in the top left of the display panel to indicate that the battery should be replaced, see figure 5.

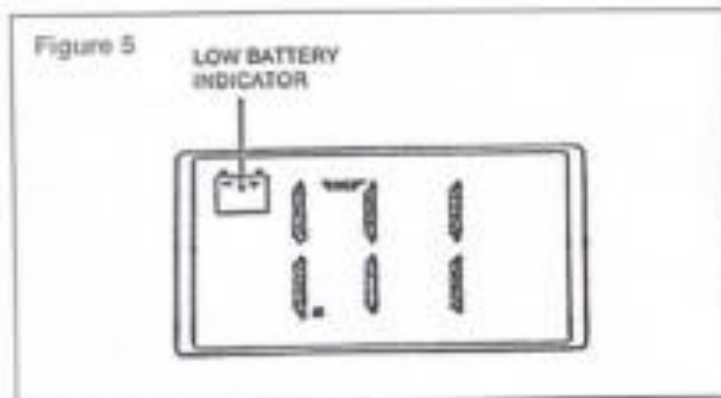

6. Troubleshooting, Hints and Tips

When first powered up the light box illumination levels vary significantly with time. Ensure that the light box is powered on for sufficient time to be stabilised before commencing density measurements.

Viewing box light levels vary both across the area of the platter and with time, be sure to perform the "zeroing procedure" whenever a measurement is to be taken in a different location on the viewing box and every two minutes to allow for variations in light box output.

The Digit-X is designed to measure optical densities in the range 0.00 to 4.00. Where densities greater than 4.00 are encountered requiring operation on light boxes greater than standard light levels, linearity problems can be encountered as the light levels used for zeroing can saturate the sensor preventing the correct readings being achieved.

The sensor must be held square to the face of the film/viewing box to ensure that the light path is closely coupled to the Digit-X sensor. If inconsistent readings are obtained be sure that this is followed.

7. Calibration and Repair

The Digit-X is supplied fully calibrated on the day of dispatch using a Transmission Density Stepwedge as described under ASME SE-1079 & ASTM E 1079-00.

A certificate of calibration is provided with the device. Xograph recommend that the unit is returned to the Technical Support Department for recalibration annually.

For an immediate quotation or for details of our full repair service please contact our Technical Support Department or email us. (See back cover for contact details).

Technical Specification

Film Types: Photographic and X-ray Film

Density Range: 0.00 - 4.00 OD

Aperture: 3mm

Resolution: 0.01

Accuracy: ± 0.05

Repeatability: ± 0.02

Display: 3 Digit 12.5mm LCD

Zero Drift: Less than ± 0.005 per minute

Sensor: Silicon photodiode with polymer optical-fibre

Power Supply: PP3 battery or equivalent

Battery Life: Zinc/Carbon PP3 - 500 operating hours
Alkaline MN1604 - 2500 operating hours

Weight: 175g

Dimensions: L210mm, W60mm (rear), 25mm
(main body), H40mm

Packed Weight: 720g

Packed Dimensions: 255mm x 220mm x 85mm

Design registered under application No. 1047179.

Xograph reserves the right to change specification and product features without notice, non-binding document.