


TERM<sup>®</sup>

## IP65防水数显卡尺



## IP65 Water-Proof Digital Caliper with inductive measuring system



IP65


高分辨率, 高精度  
High resolution, precision

SPC  
数据输出

|                |
|----------------|
| SPC-B+C-04     |
| SPC-W1-RS, RS2 |
| SPC-W2-RS, RS2 |
| SPC-W3-RS      |

- \* 电感测量系统
- \* IP65防护等级
- \* 3V锂电池CR2032, 电池寿命>1年
- \* 带SPC数据接口
- \* 分辨率0.005mm/0.01mm转换

- \* Inductive measurement system
- \* Protection grade IP65
- \* 3V Lithium battery CR2032, battery life > 1 year
- \* SPC data output
- \* Resolution 0.005mm/0.01mm

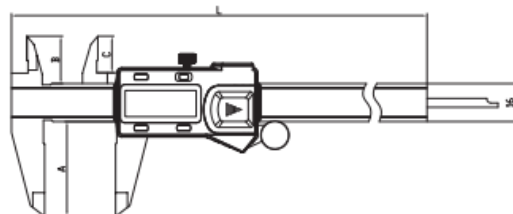

|         | A(mm) | B(mm) | C(mm) | L(mm) |
|---------|-------|-------|-------|-------|
| 0-100mm | 40    | 20    | 15.5  | 185   |
| 0-150mm | 40    | 20    | 15.5  | 235   |
| 0-200mm | 50    | 24    | 19.5  | 287   |
| 0-300mm | 60    | 26    | 21.5  | 390   |

| 货号<br>Item | 规格<br>SPEC    | 分辨率<br>Resolution | 精度(公差带)<br>Accuracy(Tolerance Range) |
|------------|---------------|-------------------|--------------------------------------|
| CDA100-100 | 0-100mm/0-4"  | 0.005mm/0.0005"   | 0.02mm/0.001"                        |
| CDA100-150 | 0-150mm/0-6"  | 0.005mm/0.0005"   | 0.02mm/0.001"                        |
| CDA100-200 | 0-200mm/0-8"  | 0.005mm/0.0005"   | 0.03mm/0.0015"                       |
| CDA100-300 | 0-300mm/0-12" | 0.005mm/0.0005"   | 0.03mm/0.0015"                       |




IP54

精度更高, 可靠性更好  
High-precision, reliable

- \* 电感测量系统
- \* IP54防护等级
- \* 3V锂电池CR2032, 电池寿命>1年
- \* 内置无线接口(可选择)
- \* 分数显示(可选择)

- \* Inductive measurement system
- \* Protection grade IP54
- \* 3V Lithium battery CR2032, battery life > 1 year
- \* Built in wireless transmission(optional)
- \* Fraction (optional)

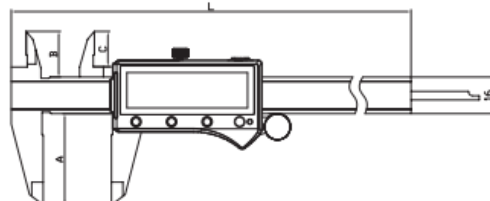

CDA200F  
CDA200FW

|         | A(mm) | B(mm) | C(mm) | L(mm) |
|---------|-------|-------|-------|-------|
| 0-100mm | 40    | 20    | 15.5  | 185   |
| 0-150mm | 40    | 20    | 15.5  | 235   |
| 0-200mm | 50    | 24    | 19.5  | 287   |
| 0-300mm | 60    | 26    | 21.5  | 390   |

| 货号<br>Item               | 规格<br>SPEC    | 分辨率<br>Resolution     | 精度(公差带)<br>Accuracy(Tolerance Range) |
|--------------------------|---------------|-----------------------|--------------------------------------|
| CDA200-100/CDA200W-100   | 0-100mm/0-4"  | 0.01mm/0.0005"        | 0.02mm/0.001"                        |
| CDA200-150/CDA200W-150   | 0-150mm/0-6"  | 0.01mm/0.0005"        | 0.02mm/0.001"                        |
| CDA200-200/CDA200W-200   | 0-200mm/0-8"  | 0.01mm/0.0005"        | 0.03mm/0.0015"                       |
| CDA200-300/CDA200W-300   | 0-300mm/0-12" | 0.01mm/0.0005"        | 0.03mm/0.0015"                       |
| CDA200F-100/CDA200FW-100 | 0-100mm/0-4"  | 0.01mm/0.0005"/1/128" | 0.02mm/0.001"                        |
| CDA200F-150/CDA200FW-150 | 0-150mm/0-6"  | 0.01mm/0.0005"/1/128" | 0.02mm/0.001"                        |
| CDA200F-200/CDA200FW-200 | 0-200mm/0-8"  | 0.01mm/0.0005"/1/128" | 0.03mm/0.0015"                       |
| CDA200F-300/CDA200FW-300 | 0-300mm/0-12" | 0.01mm/0.0005"/1/128" | 0.03mm/0.0015"                       |