

IP67 Water-Proof Color Screen Digital Caliper
with inductive measuring system



CDE210
CDE210W



高防护，可靠性更好
High-protection, reliable

ZL 201921031913.4


六种分度显示

Six kinds of
resolution display



- * 全表盘电子指针显示，彩色LCD显示屏，金属壳体
- * 精研的不锈钢淬硬尺身，拉动顺滑
- * 电感测量系统，IP67防护等级，防护性能优异
- * 电子指针与数码同步指示
- * 显示面板样式可换 ①全表盘电子指针显示 ②纯数码显示
- * 三档亮度背光屏幕，六档息屏时间
- * 可设置公差，并进行GO/NG判断
- * 示值锁定(不支持与INC、TOL同时启用)
- * 内置充电锂电池，磁吸式充电接口，充电方便、快捷
- * 可选择内置蓝牙数据传输(非蓝牙功能时DATA键无效)

- * Full screen electronic pointer display, color LCD, metal house
- * Fine lapping and hardened stainless steel beam, smooth movement
- * Inductive measurement system, IP67 protection grade, excellent protection performance
- * Electronic pointer and digit display simultaneously
- * The display mode can be changed among full screen electronic pointer display only digit display or digit and electronic pointer display simultaneously
- * Backlight display with three kinds of brightness and six kinds of power off time
- * Tolerance set and GO/NG indication
- * LCD data hold function(unavailable on INC, TOL Mode)
- * Built-in rechargeable lithium battery, magnetic charging port, convenient and fast
- * Built-in bluetooth(The DATA key is invalid without bluetooth function)

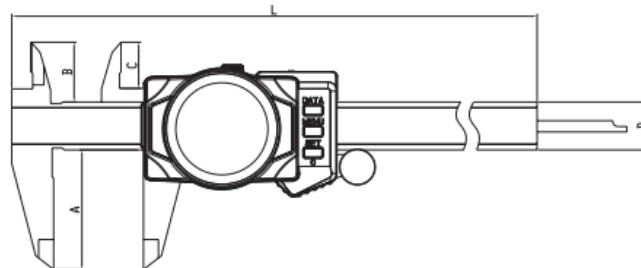

	A(mm)	B(mm)	C(mm)	L(mm)
0-100mm	40	20	15,5	185
0-150mm	40	20	15,5	235
0-200mm	50	24	19,5	287
0-300mm	60	26	21,5	390

货号 Item	规格 SPEC	分辨率 Resolution	精度(公差带) Accuracy(Tolerance Range)
CDE210-100/CDE210W-100	0-100mm/0-4"	0.01mm/0.005"/1/128"	0.02mm/0.001"
CDE210-150/CDE210W-150	0-150mm/0-6"	0.01mm/0.005"/1/128"	0.02mm/0.001"
CDE210-200/CDE210W-200	0-200mm/0-8"	0.01mm/0.005"/1/128"	0.03mm/0.0015"
CDE210-300/CDE210W-300	0-300mm/0-12"	0.01mm/0.005"/1/128"	0.03mm/0.0015"