پترو فرهان گستر جنوب
Tehran, Tehransar

TERMA®

Digital Indicator with Absolute Capacitive system

SPC
数据输出

SPC-B+C-04
SPC-W1-RS,RS2
SPC-W2-RS,RS2
SPC-W3-RS

* Absolute capacitive measurement system
* IP54 Protection grade
* 3V Lithium battery CR2032, battery life > 1 year
* SPC data output(To built in wireless transmission model, the SPC output port is only used as external power input port)
* Built in wireless transmission (optional)
* Absolute origin set at any position
* Tolerance preset and GO/NG judgement
* "+" or "-" direction set

* 绝对式容栅测量系统
* IP54防护等级
* 3V锂电池CR2032，电池寿命>1年
* 带SPC数据输出(内置无线传输机型，SPC输出端口仅作为外部电源供电输入端口)
* 内置无线传输(可选择)
* 可在任意位置设置绝对原点
* 可设置公差，并进行GO/NG判断

IDA910N
IDA910NW

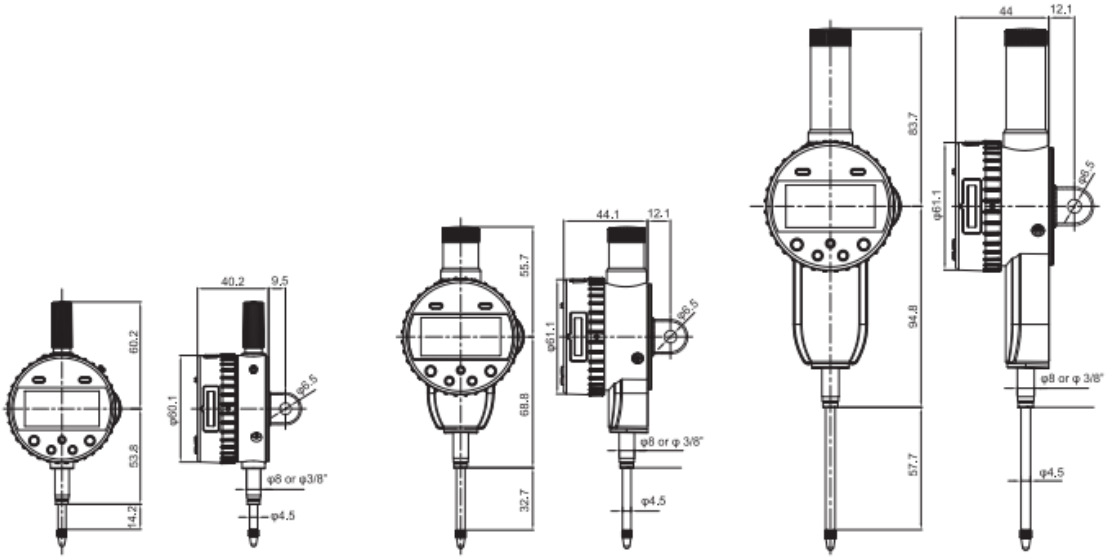

货号 Item	规格 SPEC	分辨率 Resolution	精度(公差带) Accuracy(Tolerance Range)	重复性 Repeatability
IDA910N-10/910NW-10	0-12.7mm/0-0.5"	0.01mm/0.0005"	0.01mm/0.0005"	0.01mm/0.0005"
IDA910N-25/910NW-25	0-25.4mm/0-1.0"	0.01mm/0.0005"	0.01mm/0.0005"	0.01mm/0.0005"
IDA910N-50/910NW-50	0-50.8mm/0-2.0"	0.01mm/0.0005"	0.015mm/0.001"	0.01mm/0.0005"

+982165565901
+982144584619
+989034119385

پتروفرهان گستر جنوب
FGJ-NDT.IR
DIGINDT.IR