

DM6802A+

Dual Channel - Thermocouple

-50°C ~ 1300°C

High stability, high accuracy 0.5%

Dual input channel, display T1, T2, T1-T2



Applied to all kinds of food, solid and liquid object temperature (contact) testing, cold chain, storage, heating devices, equipment surface temperature measurement.





Device, 9V battery, TP01 thermocouple, Manual, Gift box.


Other temperature probes for this thermometer

Option 1

Standard temperature probe TP02

Temperature range: $-50\sim 750^{\circ}\text{C}$, $-58\sim 1832^{\circ}\text{F}$

Insert type, for liquid and semisolid temperature test

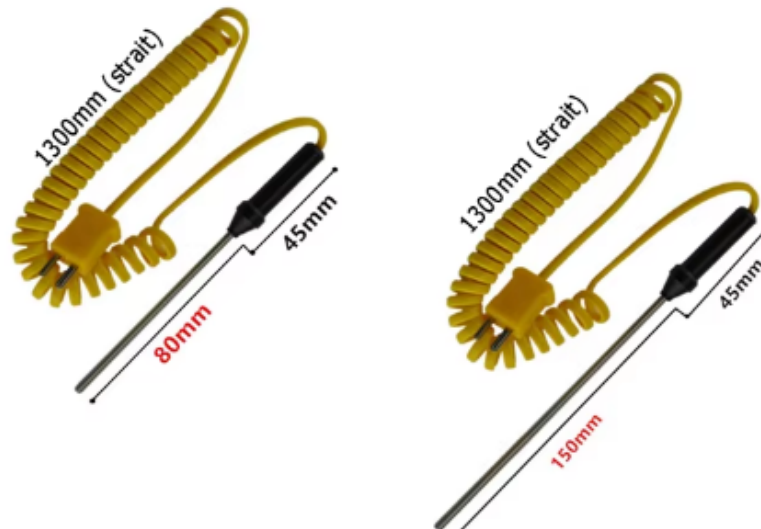

Option 2

Standard temperature probe TP03


Temperature range: $-50\sim 750^{\circ}\text{C}$, $-58\sim 1832^{\circ}\text{F}$
Contact type, for measuring surface temperature



Option 3

Standard temperature probe TP102

Temperature range: $-50\sim 1300^{\circ}\text{C}$, $-58\sim 2372^{\circ}\text{F}$
Insert type, for liquid and semisolid temperature test

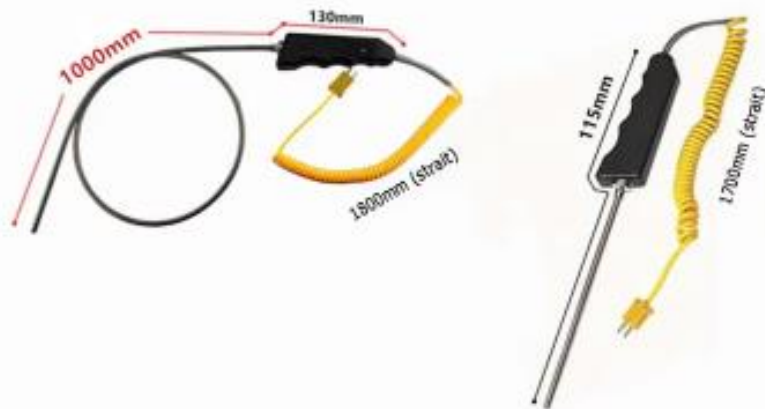

Product Description

Features:

1. New style holster, preventing dropping design, comfortable handle;
2. LCD displaying, easy reading;
3. Strong antimagnetic and anti-jamming performance;
4. Data hold;
5. High stability, high resolution: 0.4%;
6. Dual input.

Technical data:

Basic function	Range	Basic accuracy
Centigrade temperature	-50°C~0°C	$\pm(0.5\%+2)$
Centigrade temperature	0°C~1300°C	$\pm(0.5\%+1)$
Degree Fahrenheit	-50°F~1999°F	$\pm(0.7\%+2)$
T1-T2	°C/°F	$\pm[0.3\%(T1-T2 \text{ reading})+2]$

Special function	Model: DM6802A+
Low battery indication	Approx. less than 7.5V
Data hold	√
Unit symbol display	√
Function protect	√
Anti-shock protect	√
Sampling rate	3 times/s
Operation way	Manual range
Max. display	1999
LCD size	67x40mm
Battery	9V (6F22)
Power dissipation	Quiescent current approx. 3.5mA

General characteristic:

Color	Orange and Grey
Weight	250g(including battery)
Meter size	130×95×28mm
Standard accessory	battery, manual, TP01 K type temperature probe
Packing	gift box
Standard packing per carton	60pcs
Carton size	45.5*32.5*43CM
Standard G.W per carton	20kg

+982165565901

+982144584619

+989034119385

پتروفهان گستر جنوب

FGJ-NDT . IR

DIGINDT . IR