





Technical Specifications

Specifications	
Sensor	Negative Corona Sensor
Maximum sensitivity	3g/a
Warm-Up time	3s
Sensitivity adjustment	6 Levels
Alarm light	6 Levels
Battery status	√
Zero reset	√
Mute	√
Battery	AA Alkaline Battery x 4
Battery life	20h
Auto power off	√
Probe life	About 50h in normal detection condition
Operating temperature and humidity	0°C~50°C, <95%RH (non-condensing)
Characteristics	
Power supply	AA Alkaline Battery x 4
Product size	190 x 65 x 43mm (Not probe rod included)
Product net weight	312g (Not battery included)
Standrad accessories	Refrigerant Leak Detector, Quick Start Guide, Safety Guideline, AA Alkaline Battery x 4, Auxiliary Probe x 1
Standard quantity per carton	10pcs

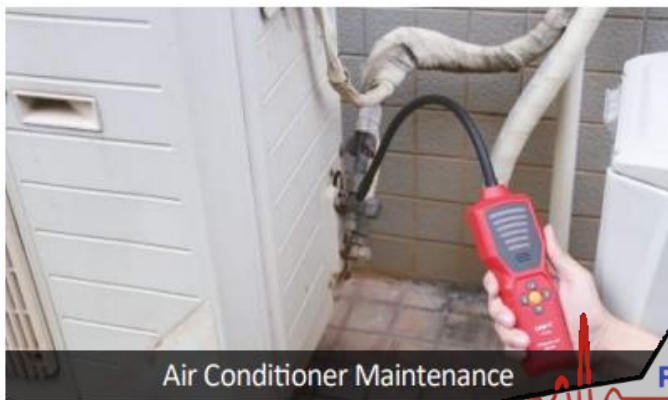

Air Conditioner Maintenance

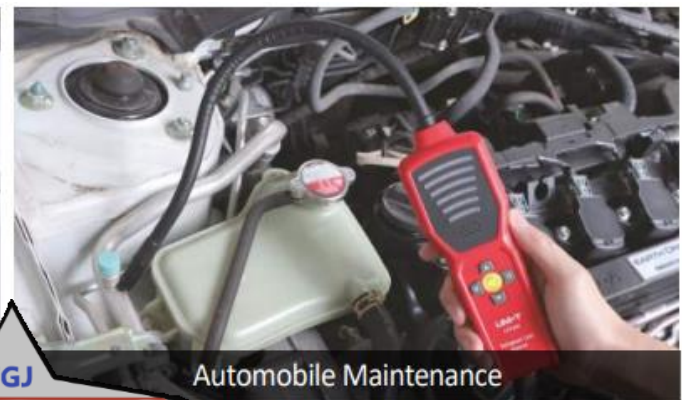

Automobile Maintenance



Refrigeration Equipment Maintenance



Refrigerant Leak Detection

Components



High Sensitivity

The maximum sensitivity is up to 3g/a



Sensor is replaceable and easy-to-use, meanwhile equipped with a spare one.

Adjustable 6-Sensitivity



Easily detect the leak condition

💡 6-Level Sound-Light Alarm



The higher refrigerant concentration is, the more frequently buzzer alarms.

💡 Supported for multiple refrigerants. Include CFCs, HCFCs, HFCs



💡 Basic Detection Flow

1



Install the Battery

2



Power On

3



Adjust sensitivity as needed

4



Detection

5



Power Off