

99,99 x 0.01 W, 520.0 x 0.1 W, PF, ACV, ACA, Signal phase

PRECISION WATT METER

Model : DW-6063

ISO-9001, CE, IEC1010

پتروفرهان گستر جنوب

FGJ-NDT.IR
DIGINDT.IR



FEATURES :

- * 0.01 W resolution, precision Watt meter is special for low power measurement.
- * Designed for the high resolution low power measurement.
- * Watt, Power factor, ACV, ACA.
- * True power (watt) measurement.
- * True rms measurement for ACV, ACA.
- * Auto range for Watt measurement :
Range 1 : 0.00 to 99.99 W x 0.01 W.
Range 2 : 100.0 to 520.0 W x 0.1 W.
- * Power factor : 0.01 to 1.00 x 0.01 PF.
- * ACV : 90.0 to 260.0 V x 0.1 V.
- * ACA : 0 to 2.000 A x 0.001 A.
- * ACV input impedance : 10 Mega OHM.
- * Data Hold, Record (Max., Min.).
- * RS232/USB Computer interface.
- * Optional data Acquisition software, SW-U801-WIN, SW-E802.
- * Optional USB cable, USB-01.

Lutron

LUTRON ELECTRONIC




The Art of Measurement

99.99 W x 0.01 W, 520.0 W x 0.1 W Power factor, ACV, ACA

WATT METER

Model : DW-6063

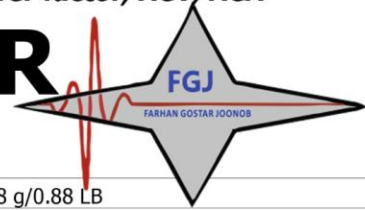

FEATURES

- * 0.01 W resolution, precision Watt meter is special for low power measurement.
- * Designed for the high resolution low power measurement.
- * LSI - circuit provides high reliability and durability.
- * Directly operation.
- * Measurement :
WATT (AC) : 99.99 W x 0.01 W, 520 W x 0.1 W
ACV : 260V x 0.1 V.
ACA : 2 A x 1 mA / 1 A x 0.1 mA.
PF : 1.00 x 0.01
- * True Power and Wide range 0 W to 520 Watt.
- * True RMS measurement of ACV / ACA.
- * Super large LCD , Dual display at same time.
- * Full function Auto range.
- * Memory Record (Max. , Min.) , Data Hold.
- * RS232 / USB Computer interface.
- * Built-in low battery indicator.
- * Built - in backlight easy to readout.
- * Power : DC 9V (006P) or AC to DC 9V adapter in.

GENERAL SPECIFICATIONS

Circuit	Custom one-chip of microprocessor LSI circuit.		
Display	Large LCD display max. reading 9999. Digit size : 21.8 x 8.5 mm. Dual value display with backlight		
Measurement Unit	ACV	0.1 to 260.0 V	
	ACA	0.1 mA to 2000 mA.	
	WATT	0.01 W to 520.0 W	
	PF	0.01 to 1.00	
Over input	" ---- " mark indication .		
Zero	Automatic adjustment		
Sampling Time	Approx. 1 second .		
Data Hold	Freeze the display reading .		
Memory Recall	Maximum & Minimum value .		
Data output	RS232 / USB PC Computer interface.		
	* Connect the optional RS232 cable UPCB - 02 will get the RS232 plug.		
	* Connect the optional USB cable USB - 01 will get the USB plug.		
Operation Temperature	0°C to 50°C (32°F to 122°F).		
Operation Humidity	Less than 80% RH		
Power Supply	Alkaline or Heavy duty type DC 9V battery 006P , MN1604 (PP3) or equivalent.		
Power Consumption	Approx. DC 10 mA		

Weight	398 g/0.88 LB
Dimension	190 x 88 x 40 mm (7.5 x 3.5 x 1.6 inch).
Accessories	Instruction manual..... 1 PC
Included	Test lead (Red & Black)..... 1 Pair
Optional Accessories	AC to DC 9V adapter Holster. HS-03 SD card DATA LOGGER, DL-9602SD USB cable , USB - 01 RS232 cable , UPCB - 02 Data Acquisition software, SW-U801-WIN Excel Data Acquisition software, SW-E802

ELECTRICAL SPECIFICATIONS (23±5 °C)

WATT (TRUE POWER)

Range	Resolution	Accuracy
520 W	0.1 W	± (1% + 0.5 W)
0 to 99.99 W	0.01 W	

- * Auto range.
- * Measuring Signal come from the front LOAD plug terminals.
- * Accuracy is test under input signal is sine wave , 50 / 60 Hz.
- * ACV ACA frequency response is from 40 to 400 Hz.
- * Max. input value, AC voltage : 260V, AC current : 2 A.
- * Accuracy @ 23°C ± 5°C.

V/A (TRUE RMS)

Range	Resolution	Accuracy
ACV 260 V	0.1 V	± (0.3 % + 0.3 V)
ACA 1 A	0.1 mA	± (0.3 % + 0.3 mA)
ACA 2 A	1 mA	± (0.3 % + 3 mA)

- * Auto range.
- * ACV, ACA accuracy is test under input signal is sine wave, 50/ 60 Hz.
- * ACV ACA frequency response is from 40 to 400 Hz.
- * Max. input value, AC voltage : 260V, AC current : 2 A.
- * Accuracy @ 23°C ± 5°C

PF (Power factor)

Range	Resolution	Accuracy
1.00	0.01	± (1 % + 2d)

- * ACV, ACA accuracy is test under input signal is sine wave, 50/ 60 Hz
- * ACV ACA frequency response is from 40 to 400 Hz.
- * Max. input value, AC voltage : 260V, AC current : 2 A.
- * Accuracy @ 23°C ± 5°C

* Appearance and specifications listed in this brochure are subject to change without notice.

1403-DW6063

+982165565901

+982144584619

+989034119385