

**Smart, 1,000 A, + max. hold  
CAT III 1,000 V, CAT IV 600 V**




# DCA/ACA CLAMP METER

**Model : CM-6156** پترو فرهان گستر جنوب ISO-9001, CE, IEC1010

[DIGINDT.IR](http://DIGINDT.IR)

[FGJ-NDT.IR](http://FGJ-NDT.IR)

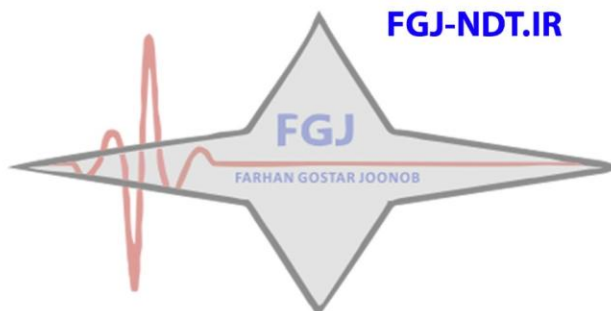

**Smart, 1,000 A, + max. hold  
DCA/ACA CLAMP METER**

**Model : CM-6156**

- \* V : Smart ACV/DCV Automatically.
- \*  $\Omega$  : Resistance, Diode, Continuity, Capacitance. Automatically.
- \* 600A : Smart DCA/ACA.
- \* 1000A : Smart DCA/ACA.
- \* Function keys : Select, Zero, Hz, Max/Min, Range, Hold.
- \* CAT III 1000V, CAT IV 600V.
- \* Max. hold ( Max., Min. measuring value )
- \* 33 mm measuring conductor size.
- \* Auto power off.

[FGJ-NDT.IR](http://FGJ-NDT.IR)

[DIGINDT.IR](http://DIGINDT.IR)



**Lutron**

**LUTRON ELECTRONIC**

**The Art of Measurement**

Smart, 1000 A, IEC1010 CAT III 1000V, + max. hold

# DIGINDT.IR DCA/ACA CLAMP METER FGJ-NDT.IR

Model : CM-6156

پترو فرهان گستر جنوب

## FEATURES

- \* Meet IEC 1010 CAT III 1000 V safety requirement.
- \* 6000 counts A/D, high resolution.
- \* ACV, ACA, DCV, DCA, ohms, continuity, Hz, Capacitance, Diode.
- \* Smart function, Auto range or manual range with hold.
- \* Smart operation, Build in 4 intelligent function : " V " , " Ω " , " 600A " , " 1000A " .
- \* V " function can select ACV, DCV automatically with auto range.
- \* " Ω " function can select the Resistance , Diode, Continuity beeper, Capacitance automatically with auto range.
- \* " 600A " & " 1000A " function can select ACA, DCA automatically.
- \* Data hold .
- \* Auto shut off is available to save battery life.
- \* 10 M ohm impedance for voltage circuit.
- \* Built-in overload protection for most ranges.
- \* LSI circuit provides high reliability and durability.
- \* Uses durable, long-lasting components, enclosed in strong, light weight ABS-plastic housing.
- \* Full line optional adapters : Clamp adapter, Tachometer adapter, Pressure adapter, Humidity Adapter, Sound level adapter, Anemometer adapter, Light adapter, EMF adapter.

## GENERAL SPECIFICATIONS

Display	39.5 mm x29.8 mm large LCD display
Measurement	DCV, ACV, DCA, ACA, Resistance, Capacitance, Frequency, Diode, Continuity beeper.
A/D counts no.	6000 counts.
Smart function	" V " function can select ACV, DCV automatically with auto range. " Ω " function can select the Resistance, Diode, Continuity beeper, Capacitance automatically with auto range. 600A " " 1000A " function can measure ACA, DCA .
MAX./MIN.	Records Maximum & Minimum readings with recall.
Data hold	To freeze the display reading on the LCD display
Power On/Off management	Auto power of or manual power off.
Hz button	When execute the voltage or current function also can measure the frequency of signal.
Selection Range	Smart function or auto function . manual range selecting.
Polarity	Automatic Switching, " - " indicates negative polarity.
Sampling time	Approx. 0.5 to 1 second.
Operating Temperature	0 °C to 50 °C (32 °F to 122 °F)
Operating Humidity	Max. 80% RH. ☎ +982165565901
Power supply	DC 9 V battery 006P,MN1604 ☎ +982144584619
Power consumption	Approx. DC 9.1 mA. ☎ +989034119385
Max. Conductor Size	32 mm (1.3 inch) Dia.. ☎ Tehran, Tehransar
Dimension	241 x94 x 46 mm ( 9.5 x 3.7 x 1.8 inch ).
Weight	373 g/0.82 LB ( w/o battery ).
Accessories Included	Red and Black Test Leads..... 1 Set Instruction Manual..... 1 PC Soft carrying case ..... 1 PC

Optional accessories	Full line adapters : ACA/DCA current adapter, Tachometer adapter, Humidity adapter, Pressure adapter, Light adapter, EMF adapter, Sound level adapter, High voltage probe.
----------------------	--

## ELECTRICAL SPECIFICATIONS (23± 5 °C)

### DC Voltage

Range	600 mV /6 V/60 V/600 V /1000 V
Resolution	0.1 mV/0.001 V/0.01 V/0.1 V/1 V
Accuracy	± ( 0.8% + 2d ) 600 mV ± ( 0.8% + 1d ) 6 V, 60 V, 600 V, 1000 V
Input impedance	10 M ohm.
Over load protection	600 mV range ± 500 DCV, 350 ACV other ranges ± 1000 DCV, 1000 ACV

### AC Voltage

Range	6 V/60 V/600 V/1000 V
Resolution	0.001V /0.01V /0.1V/1 V
Accuracy	± ( 1% + 2d ) * Spec. are tested under 50/60 Hz.
Input impedance	10 M ohm.
Over load protection	600 mV ran± 500 DCV, 350 ACV other range± 1000 DCV, 1000 ACV

### DC Current, AC Current

Range	600A/1000A
Resolution	0.1A /1A
Accuracy	600 A Range ± ( 1.5% +15d ) 1000 A Range ± ( 2% +8d )
Over load protection	AC/DC 1000A
Remark	* ACA specification be tested on sine wave 50/60 Hz. * Measurement range : 0.1A to 1000A

### Diode

Short/non conductance, good/defect test
---

### Capacitance

Range	6 nF/60 nF/600 nF/6 uF/60 uF/600 uF
Resolution	0.001nF/0.01nF/0.1 nF/0.001uF/0.01uF/0.1uF
Accuracy	± ( 3 % + 5d )
Over load protection	± 30 DCV, 30 ACV.
Remark	Discharge capacitor before testing.

### Frequency

Range	40Hz to 1KHz	FGJ-NDT.IR
Resolution	0.001kHz	
Accuracy	± ( 0.5% + 2d )	
Over load protection	± 1000 DCV, 1000 ACV.	DIGINDT.IR

### OHMS ( auto range )

Range	600/6 K/60 K/600 K/6 M/60M
Resolution	0.1Ω /0.001K/0.01K/0.1K/0.001M/0.01M
Accuracy	600 ohm : ± ( 1 % + 2d ) 6K/60K/600K/6M/60M : ± ( 1.5 % + 2d )
Over load protection	± 350 DCV, 350 ACV.

### Continuity Beeper

Beeper will sound if measured resistance less than 20 ohm.
--

### Max. & Min. Measurement

During the operation can memorize the maximum and the minimum measurement value.
--

\* Appearance and specifications listed in this brochure are subject to change without notice.

1502-CM6156