

Auto range, Separate probe, AC output, Memory


## SOUND LEVEL METER

Model : SL-4013



Tehran, Tehransar

ISO-9001, CE, IEC1010

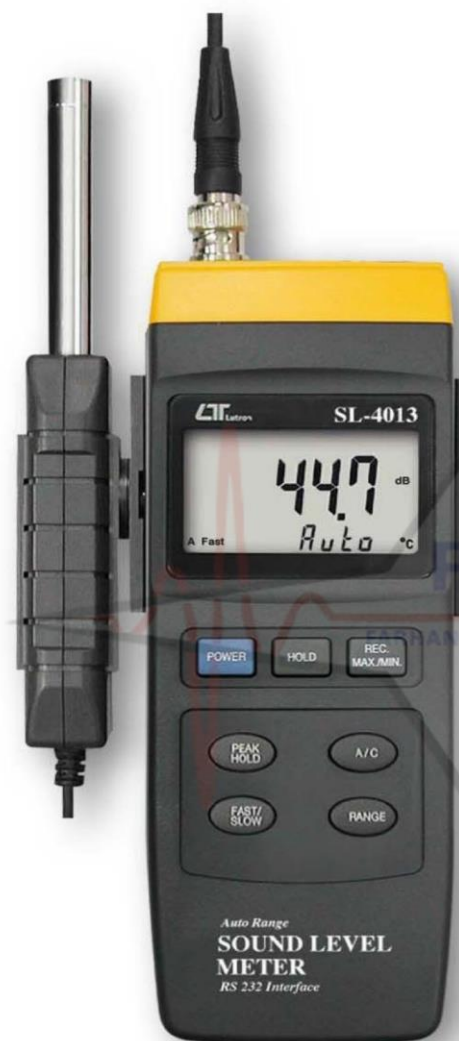

### FEATURES

- \* Separate sound probe, easy operation.
- \* Large LCD display, easy to read.
- \* Frequency weighting meet IEC 61672 class 2.
- \* Auto range & manual range.
- \* A & C frequency weighting.
- \* Fast & Slow time weighting
- \* AC output for system expansion.
- \* RS232 computer interface.
- \* External calibration VR.
- \* Hold & Memory record.
- \* High accuracy condenser microphone
- \* Peak Hold.
- \* Over and under load indicator.
- \* LCD display.
- \* Durable, strong light weight ABS-plastic housing case.



# **Lutron**

## LUTRON ELECTRONIC

**The Art of Measurement**

پنروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR

+982165565901

+982144584619

+989034119385


**Auto range, Separate probe, AC output, Memory  
DIGITAL SOUND LEVEL METER, Model : SL-4013**
**FEATURES**

* Large LCD display, easy to read.	* Build in adj. VR is available for easy calibration.
* Frequency weighting networks are designed to meet IEC 61672 class 2.	* Hold & Memory record ( max., min. )
* Auto range & manual range.	* Condenser microphone for high accuracy & stability.
* A & C weighting networks are conformity to standards.	* Peak Hold function for stored the maximum value.
* Fast & Slow dynamic characteristic modes.	* Warning indicator for over and under load.
* AC output for system expansion.	* LCD display for low power consumption & clear read-out even in bright ambient light condition.
* RS232/USB computer interface.	* Used the durable, long-lasting components, including a strong light weight ABS-plastic housing case.
* Separate sound probe, easy for remote sound measurement.	* Compact and light weight plastic housing.

**SPECIFICATIONS**

Display	52 mm x 32 mm LCD (Liquid Crystal Display), 5 digits.	
Function	dB (A & C frequency weighting), Time weighting(Fast, Slow), Hold, Memory ( max. & min. ), Peak hold, AC & RS232 output.	
Measurement Range	30 - 130 dB.	
Resolution	0.1 dB.	
Accuracy (23 ± 5 °C)	Frequency weighting meet IEC 61672 class 2, calibrating input signal on 94 dB ( 31.5 Hz to 8 KHz), then the accuracy of frequency weighting is specified as following: 31.5 Hz - ± 3 dB, 63 Hz - ± 2.5 dB, 125 Hz - ± 2.0 dB 250 Hz - ± 1.9 dB, 500 Hz - ± 1.9 dB, 1 kHz - ± 1.4 dB 2 kHz - ± 2.6 dB, 4 kHz - ± 3.6 dB, 8 kHz - ± 5.6 dB	
Frequency Weighting Network	Characteristics of A & C.	
	A weighting - The characteristic is simulated as "Human Ear Listing" response. Typical, if making the environmental sound level measurement, always select to A weighting. C weighting - The characteristic is near the "FLAT" response. Typical, it is suitable for checking the noise of machinery (Q.C. check) & knowing the sound pressure level of the tested equipment.	
Frequency	31.5 Hz to 8,000 Hz.	
Calibrator	B & K (Bruel & kjaer), multi-fuction acoustic calibrator, model : 4226.	
Microphone	Electric condenser microphone.	
Size of microphone	1/2 inch standard size.	
Range selector	Auto range : 30 to 130 dB. Manual range : 3 range, 30 to 80 dB, 50 to 100 dB, 80 to 130 dB, 50 dB on each step, with over & under range indicating.	
Time Weighting (Fast & Slow)	Fast - t = 200 ms, Slow - t = 500 ms, * "Fast" range is simulated the human ear response time weighting. "Slow" range is easy to get the average values of vibration sound level. * The "Fast" & "Slow" time weighting range are designed to IEC 61672 class 2 requirement.	
Output Signal	* AC output - AC 0.5 Vrms corresponding to each range step. Output impedance - 600 ohm. * RS232 output.	
Output terminal	Terminal 1 : RS232 computer interface terminal. Terminal 2 : AC output terminal. * Terminal socket size : 3.5 mm dia. phone socket.	
Calibration VR	Build in external calibration VR, easy to calibrate on 94 dB level by screw driver.	
Operating Temp.	0 °C to 50 °C ( 32 °F to 122 °F ).	
Operating Humidity	Less than 80% RH.	
Power Supply	006P DC 9V battery ( Alkaline or heavy duty type ).	
Power Consumption	Approx. DC 6mA.	
Dimension	Main instrument	205 x 68 x 29 mm ( 8.07x2.7x1.1 inch ).
	Sound probe	170.5 x 24.5 x 19 mm ( 6.7x1.0x0.7 inch ).
Weight	405 g/0.89 LB ( including probe ).	
Standard Accessories	Instruction manual ..... 1 PC. Separate sound probe..... 1 PC. Probe holder..... 1 PC.	
Optional	Sound Calibrator, model : SC-941 ( 94 dB ). SC-942 ( 94dB, 114 dB ). Carrying case : CA-06 RS232 cable, Model : UPCB-02 USB cable, Model : USB-01 Application software, Model : SW-U801-WIN	

\* Appearance and specifications listed in this brochure are subject to change without notice.

0711-SL4013

+982165565901

+982144584619

+989034119385

پروفهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR