



Penetrant Testing

Product information

MR[®] 68 C Penetrant red and fluorescent

MR[®]
CHEMIE
NDT-materials

TO SEE MORE!

پترو فرهان گستر جنوب

MR[®] 68 C Penetrant red and fluorescent

for penetrant testing acc. to EN ISO 3452-1:2013



General appearance and composition:

- Water and solvent removable penetrant red and fluorescent
- Based on mineral oil, contains glycols
- Suitable for all metals (suitability for plastics and ceramics needs testing prior to use)
- Without AZO-dye-stuff
- Suitable for very smooth surfaces
- Processing temperature **-10 to +50 °C**
- Aerosol overhead sprayable

FGJ-NDT.IR
DIGINDT.IR

Relevant approvals and specifications

- Sample testing acc. to EN ISO 3452-2:2006
- Sensitivity class 2 acc. to DIN EN ISO 3452-2:2006
system IIAe
 - Remover: Water
 - Developer: MR[®] 70
- Sensitivity class 2 acc. to DIN EN ISO 3452-2:2006
system IIIc
 - Remover: MR[®] 79, MR[®] 85, MR[®] 88
 - Developer: MR[®] 70
- Sensitivity class 2 acc. to DIN EN ISO 3452-2:2006
system IIIE
 - Remover: Water, MR[®] 85
 - Developer: MR[®] 70
- Low content of halogens and sulphur according to DIN EN ISO 3452-2:2006 and ASME Code V, Section V, Article 6
- In correspondence with Lloyd's Reg., Bureau Veritas, Det Norske Veritas, admitted by Framatome ANP
- Produits et Matériaux Utilisables en Centrales (PMUC)
- TLV 9017 01:2011-01

+982165565901

+982144584619

+989034119385

Application:

- Remove tinder, rust and other contaminations from surface in a suitable manner. A possible pre-cleaner for removal of oils or fats is e.g. our remover MR[®] 79.
- Apply MR[®] 68 C Penetrant red and fluorescent to the part to be tested either by spraying, brushing, flooding or dipping. Allow to penetrate for at least 5 minutes.
- Remove excess penetrant from surface either using water or a clean lint-free cloth lightly moistened with an MR[®] Remover.
- Spray MR[®] Developer (e.g. MR[®] 70) from a distance ⁺⁹⁸²¹⁶⁵⁵⁶⁵⁹⁰¹ cm on the dry surface, achieving a thin, uniform layer. Surface ⁺⁹⁸²¹⁴⁴⁵⁸⁴⁶¹⁹ appear as red indications on a white background or fluorescent uni ⁺⁹⁸⁹⁰³⁴¹¹⁹³⁸⁵ ase note: If the developer layer is too thick tiny discontinuities will not appear through the developer.

11.02.2015/2b Tehran, Tehransar

Technical changes reserved!

MR[®] Chemie GmbH · Nordstr. 61-63 · 59427 Unna (Germany) · www.mr-chemie.de
Tel.: +49 (0)2303 95151-0 · Fax: +49 (0)2303 95151-10 · e-mail: post@mr-chemie.de

1/2

CRACK
Marker



Penetrant Testing

Product information

MR® 68 C Penetrant red and fluorescent

پترو فرهان گستر جنوب

MR[®]
CHEMIE
NDT-materials

TO SEE MORE!

Minimum shelf life:

- Will keep for a minimum of 4 years, stored at room temperature

Pack sizes:

- Aerosols, 500 ml (1 box contains 12 aerosols)
- 5 L, 30 L, 200 L
- Valve pen




FGJ-NDT.IR

DIGINDT.IR

☎ +982165565901

☎ +982144584619

☎ +989034119385

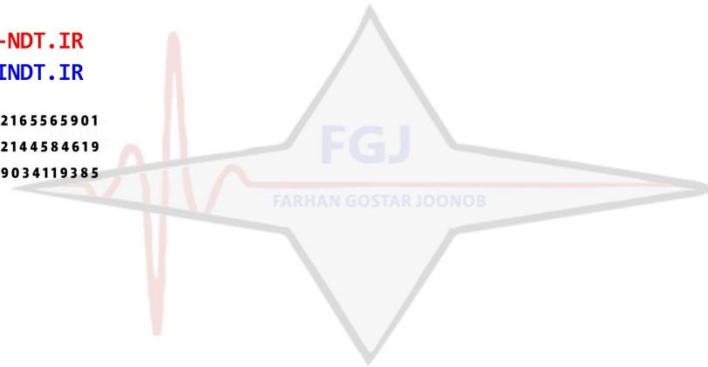

Tehran, Tehransar

11.02.2015/db

****Technical changes reserved!****

MR® Chemie GmbH · Nordstr. 61-63 · 59427 Unna (Germany) · www.mr-chemie.de
Tel.: +49 (0)2303 95151-0 · Fax: +49 (0)2303 95151-10 · e-mail: post@mr-chemie.de

NDT-materials
CRACK
Marker

2 / 2