



### Phase Sequence Indicator(Contact Type)




#### FEATURES

- Two functions in one unit: open phase and phase sequence detection
- Lamps indicate at-a-glance if phase is open
- Large alligator clips for easy attachment to switch board terminals
- Checks a wide range of 3-phase power sources
- Special test lead lengths available on request
- Rugged push button switch designed to minimize damage due to heavy use

#### SPECIFICATIONS

	ST-850	855 PR
Voltage	90V-600V AC	200V-600V AC
Frequency response	50 / 60 Hz	50 / 60 Hz
Operating temperature & humidity	0°C ~ 40°C at 80% Max. relative humidity	
Storage temperature & humidity	-10°C ~ 50°C at 90% Max. relative humidity	
Cord	1.1m each of red(R), white(S) and black(T) cord	
Dimensions	134(L) X 85(W) X 45(D)mm	
Weight	Approx. 510g	Approx. 530g
Safety standard	IEC 1010 CAT III 600V	EN 61010-1 CAT IV 600V EN 61326-1
Accessories	Instruction manual Soft pouch	

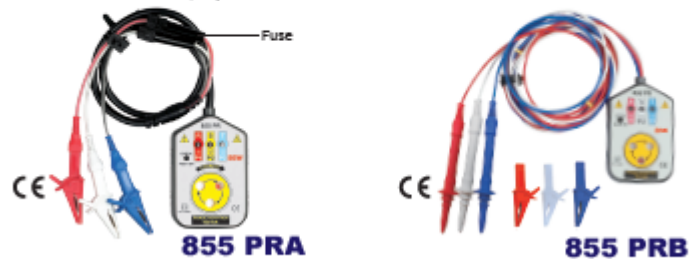

- Silicone wire 2m + Fuse + Alligator(AL-26 CA)
- EN 61010-1 CAT IV 600V  
EN 61326-1

+982165565901  
+982144584619  
+989034119385

FGJ-NDT.IR  
DIGINDT.IR

Tehran, Tehransar