

ULTRASONIC LEAKAGE DETECTOR ULTRASONIC TRANSMITTER



Model : GS-5800, GS-400

ISO-9001, CE, IEC1010

پتروفرهان گستر جنوب

Tehran, Tehransar



ULTRASONIC LEAKAGE DETECTOR

Model : GS-5800

Lutron

LUTRON ELECTRONIC

+982165565901

+982144584619

+989034119385



ULTRASONIC TRANSMITTER

Model : GS-400



The Art of Measurement

پتروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR

ULTRASONIC LEAKAGE DETECTOR

Model : GS-5800 Tehran, Tehransar **پتروفرهان گستر جنوب**



FEATURES

ULTRASONIC LEAKAGE DETECTOR is designed to locate the source of the ultrasonic emissions generated by gas, air leaks.... The leakage level is displayed by "Bar LED Display Panel" and converted to audible sound by either internal buzzer or external optional earphone.



SPECIFICATIONS

Sensitivity for Leakage Indicator	Bar LED display panel & audible tone. * <i>The LED display indicator of the detector is a relative measurement only.</i>
Frequency Response	20 KHz to 100 KHz.
Power Supply	DC 9V battery. 006P, MN1604 (PP3) or equivalent, Alkaline or heavy duty type battery.
Power Consumption	Approx. DC 34 mA.
Operating Temp.	0 °C to 50 °C (32 °F to 122 °F).
Operating Humidity	Less than 80% RH.
Weight	Approx. 260 g/0.57 LB (including battery).
Size	HWD 255 x 70 x 28 mm (10.0 x 2.8 x 1.1 inch).
Accessories Included	Operational manual.....1 PC. Rubber bottle plug with plastic tubing.....1 PC. 1/2 inch PVC pipe.....1 PC. Hard carrying case.....1 PC.
Optional Accessory	Earphone, Model : EA-100

MISCELLANEOUS ACCESSORIES (accessories included)

Rubble bottle plug with plastic tubing

1/2 inch PVC pipe

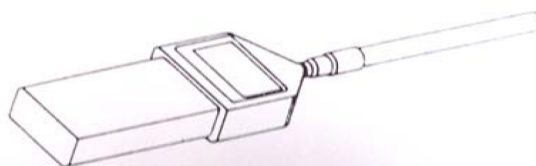

ULTRASONIC TRANSMITTER


Model : GS-400

SPECIFICATIONS


Frequency Output	40 KHz.
Oscillator Circuit	640 KHz crystal time base & divided by 16.
Operating Temperature	0 °C to 50 °C (32 °F to 122 °F).
Operating Humidity	Less than 80% RH.
Power Supply	DC 9V battery. 006P, MN1604 (PP3) or equivalent, Alkaline or heavy duty type battery.
Power Consumption	Approx. DC 7.5 mA.
Weight	122 g/0.27 LB (included battery).
Size	146 x 50 x 26 mm (5.7 x 2.0 x 1.0 inch).
Accessories Included	Operational manual.....1 PC.

Applications for Ultrasonic transmitter (GS-400) cooperate with the Ultrasonic Leakage Detector (GS-5800)


Air leaks around door seals




Water leaks in roofs




Windshield leaks



Air leaks around window seals



Conduit & pipe identification



Others (GS-5800 only) :

- * Vacuum leaks.
- * Gas or air leaks.
- * Leaks in refrigeration and air condition systems.
- * Tire & tube leaks.
- * Engine seals.

* Appearance and specifications listed in this brochure are subject to change without notice.

0509-GS5800GS400

+982165565901

+982144584619

+989034119385

پتروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR