

# TURBIDITY METER

Model : TU-2016

ISO-9001, CE, IEC1010



**Lutron**

LUTRON ELECTRONIC

*The Art of Measurement*

- +982165565901
- +982144584619
- +989034119385


پتروفرهان گستر جنوب  
FGJ-NDT.IR  
DIGINDT.IR

# TURBIDITY METER

Model : TU-2016

پتروفرهان گستر جنوب

Tehran, Tehransar

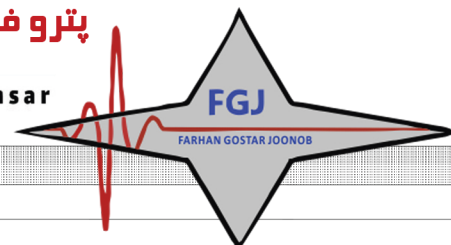

## FEATURES

- \* Designed to meet ISO 7027.
- \* NTU ( Nephelometric TURBIDITY Unit ) measuring unit.
- \* Wide and auto measurement range : 0 to 1,000 NTU.
- \* High resolution : 0.01 NTU/1 NTU.
- \* The unique optics structure, enables the instrument to read low value of TURBIDITY to the high level up to 1,000 NTU.
- \* Four operation buttons and two calibration points, easy operation.
- \* Jumbo LCD, easy readout.
- \* Microprocessor circuit assures maximum possible accuracy, provides special functions and features.
- \* Battery operated for field and on-site testing convenience.
- \* Data hold function for freezing the desired value on display.
- \* Records Maximum and Minimum readings with Recall.
- \* Heavy duty & compact housing with hard carrying case, designed for easy carry out & operation.
- \* Auto shut off is available to save battery life.
- \* Application : Test municipal water, food and beverage water, or other aqueous solution where fluid clarity is important.

## SPECIFICATIONS

Circuit	Custom one-chip of microprocessor LSI circuit.
Display	LCD size : 41 mm x 34 mm
Range	0.00 to 50.00 NTU, 50 to 1,000 NTU * NTU : Nephelometric Turbidity Unit * Auto range
Resolution	0.01 NTU/ 1 NTU
Accuracy	± 5 % F.S. or ± 0.5 NTU, which ever is greater.
Light source	LED, 850 nm.
Detector	Photo diode
Standard	Meet ISO 7027.
Response time	Less than 10 seconds.
Sample volume needed	10 mL.
Data Hold	Freeze the display reading.
Memory Recall	Maximum & Minimum value.
Display Sampling Time	Approx. 1 second.
Power off	Auto shut off saves battery life or manual off by push button.
Calibration points	0 NTU, 100 NTU.
Operating Temperature	0 to 50 °C.
Operating Humidity	Less than 85% R.H.
Power Supply	DC 1.5 V battery ( UM4, AAA ) x 6 PCs, or equivalent.
Power Current	Stand by      Approx. DC 3.5 mA. Testing        Approx. DC 36 mA.
Weight	320 g/0.70 LB. <i>@ Battery is included.</i>
Dimension	155 x 76 x 62 mm ( 6.1 x 3.0 x 2.4 inch)
Accessories Included	Testing bottle with 0 NTU standard solution..... 1 PC Testing bottle with 100 NTU standard solution..... 1 PC Empty testing bottle..... 2 PCs Clean cloth..... 1 PC Clean solution ( Distill water )..... 1 bottle Hard carrying case, CA-08..... 1 PC
Optional Accessories	* Testing bottle with 100 NTU standard solution, TU-100NTU * Testing bottle with 0 NTU standard solution, TU-0NTU * Empty testing bottle, 0601

\* Appearance and specifications listed in this brochure are subject to change without notice.

0812-TU2016

+982165565901

+982144584619

+989034119385

پتروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR