

TYPE K

TEMPERATURE PROBE



Model : TP-01, TP-02A, TP-03, TP-04

ISO-9001, CE, IEC1010

پتروفرهان گستر جنوب

Tehran, Tehransar



TP-01



TP-02A



TP-03



TP-04



Lutron

LUTRON ELECTRONIC

+982165565901

+982144584619

+989034119385

The Art of Measurement


پتروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR

TYPE K TEMPERATURE PROBE

Model : TP-01, TP-02A, TP-03, TP-04

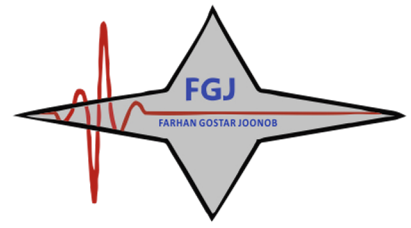

پتروفرهان گستر جنوب
Tehran, Tehransar

Type K PROBE Model :	Measurement Range	Accuracy	
(Type K) TP-01	* Max. short-term operating Temperature : -40 °C to 250 °C -40 °F to 482 °F. * It is an ultra fast response naked-bead thermocouple suitable for many general purpose application.	± 0.4 % °C	
Thermocouple Probe (Type K), TP-02A	* Measure Range: -50 °C to 900 °C, -58 °F to 1652 °F. * Dimension: 12cm tube, 3.2mm Dia.	± 0.75 %	
Thermocouple Probe (Type K), TP-03	* Measure Range: -40 °C to 1050 °C, -40 °F to 1922 °F. * Dimension: 15cm tube, 8mm Dia.	-40 °C to 375 °C	± 1.5°C
		376 °C to 1050 °C	± 0.4 %
Surface Probe (Type K), TP-04	* Measure Range: -50 °C to 400 °C, -58 °F to 752 °F. * Size : Temp. sensing head - 15 mm Dia. Probe length - 120 mm.	± (0.75 % +0.5 °C)	

* Appearance and specifications listed in this brochure are subject to change without notice. 1709-TEMP-PROBE

+982165565901

+982144584619

+989034119385

پتروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR