

# TES-3092 DC/AC CLAMP METER



## FEATURES

- 3-1/2 Digital LCD, 2000 count.
- Pocket size.
- MAX hold / Data hold function.
- One touch DCA zero.



## SPECIFICATION

### DC Current

Range	Resolution	Accuracy	Overload protection
200A	0.1A	+/- ( 1.5%rdg + 2dgts)	700Arms
700A	1A		

### AC Current

Range	Resolution	Accuracy	Frequency Range	Overload protection
200A	0.1A	+/- ( 2%rdg + 4dgts)	50 / 60Hz	700Arms
700A	1A			

### DC Voltage (Auto Range)

Range	Resolution	Accuracy	Input Impedance	Overload protection
600V	1V	+/- (1%rdg + 1dgts)	1M Ω	600Vrms

### AC Voltage

Range	Resolution	Accuracy	Frequency Range	Input Impedance	Overload protection
600V	1V	+/- (1.5%rdg + 4dgts)	50 ~ 400Hz	1M Ω	600Vrms

### Ohms (Resistance)

Range	Resolution	Accuracy	Overload protection
2K Ω	1 Ω	+/- ( 1%rdg+ 1dgts)	600Vrms

### Continuity beeper

Range	Sound Level	Max Open Circuit Voltage	Overload protection
	<=30 W	3V	600Vrms

### GENERAL SPECIFICATIONS

LCD Display	
-------------	--

+982165565901


+982144584619


+989034119385

پتروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR

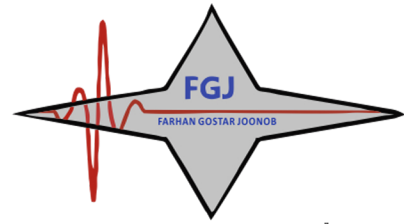

	3-1/2 digits, (MAX 1999). OL for over-range indication.  for Low battery indication.
Power Source	One 9V battery. (006P or IEC6F22).
Battery Life	100hr approx.
Operating/Storage Condition	0 to 50 < 80%RH. -10 to 60 < 70%RH.
Dimensions	188(L) x 62.5(W) x 30.5(H)mm
Weight	Approx. 185 g
Jaw Opening Diameter	Cables 27.5 mm
Accessories	Instruction Manual ,Battery, Test Lead and Carrying Case.

**TES** TES Electrical Electronic Corp.

Office: 7F, No. 31, Lane 513, Rui Guang Road, Neihu Dist., Taipei,  
Taiwan, R.O.C.  
TEL:886-2-2799-3660 FAX:886-2-2799-5099  
E-Mail: [tes@ms9.hinet.net](mailto:tes@ms9.hinet.net)

+982165565901

+982144584619

+989034119385

پتروفرهان گستر جنوب

**FGJ-NDT.IR**

**DIGINDT.IR**