



PROVA A3

AC/DC Clamp Meter

پتروفرهان گستر جنوب

Tehran, Tehransar

CE

IEC 61010

CAT III 600V CAT IV 300V

Features:

1. Best resolution of AC/DC current measurement: **10mA**.
2. AC/DC current measurement: **400A**.
3. AC/DC voltage measurement: **600V**.
4. AC current measurement: **Average Sensing**.
5. **Resistance, Continuity, Capacitance and Temperature** ($^{\circ}\text{C}/^{\circ}\text{F}$) measurement.
6. Non-contact (A) and Contact (V) **Frequency** measurement.
7. Voltage/Current **Peak value** measurement.
8. **Auto range**: V, A, Resistance, Capacitance and Temperature.
9. **Auto** and **Manual** ranges.
10. **6000 counts**.
11. **One Touch Zero** for DCA adjustment.
12. **25mm** large jaw diameter.
13. **Auto-power-off** function (30 min.).
14. With **backlight**.
15. Max Hold, Peak Hold and **Delta** (Δ) functions.
16. **Dual display**: Hold + Ave, MAX + MIN, Δ MAX + Δ MIN.
17. **Dual display**: Hold + Ave, Peak Max + Peak Min, Δ Peak Max + Δ Peak Min.
18. On-line automotive battery and alternator testing Min battery cranking voltage and Max alternator charging voltage.
19. **Low Pass Filter** (LPF, 1KHz, -3dB) (e.g. for VFD measurement).
20. **600V overload protection** for **Resistance** (Ω) and **Capacitance** measurement.
21. Ideal for works in crowded switch box or cable areas.

+982165565901


+982144584619

+989034119385

پتروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR

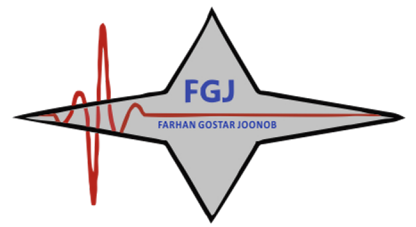

22. Applications:

(1) Troubleshooting in

- i. Automotive Maintenance
- ii. electric vehicle
- iii. plant maintenance
- iv. HVAC
- v. telecom works
- vi. marine
- vii. motorcycle repairs

(2) DC charging current of batteries of electric vehicles.

(3) DC current consumption of DC motors of Drones.

(4) DC current output of solar panels.

(5) Measurements of voltage, current, and frequency of inverters (VFD).

(6) Temperature measurements of abnormal components.

پتروفرهان گستر جنوب

Tehran, Tehransar

Electrical Specifications: (23°C ±5°C)

DC Current

Range	Resolution	Accuracy	Overload Protection
60 A	10mA	±1.5%±2dgts	DC 400A
0-150 A	100mA	±1.5%±2dgts	
150-300 A	100mA	±2.2%±2dgts	
300-400 A	100mA	±4%±2dgts	

DCA Peak MAX ±400A Accuracy + additional ±2%±50dgts

AC Current

Range	Resolution	Accuracy		Overload Protection
		50/60 Hz	40 - 500Hz	
60A	10mA	±1.5%±3dgts	±2.0%±4dgts	AC 400A
0-150A	100mA	±1.5%±3dgts	±2.0%±4dgts	
150-300A	100mA	±2.2%±3dgts	±2.5%±4dgts	
300-400A	100mA	4%±3dgts	5%±4dgts	

ACA Peak MAX ±400A Accuracy + additional ±2%±50dgts

LPF @1KHz -3db

DC Voltage (Overload Protection 600V)

Range	Resolution	Accuracy	Input Impedance
60V	10 mV	±1.5%±3dgts	10MΩ
600V	100 mV		

DCV Peak MAX ±600V Accuracy + additional ±2%±50dgts

+982165565901


+982144584619

+989034119385

پتروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR

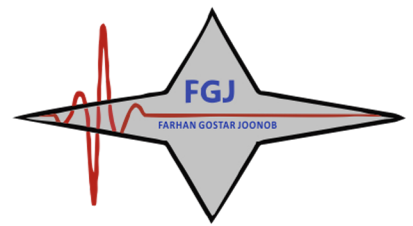**AC Voltage** (Input Impedance 10 M Ω)

Range	Resolution	Accuracy		Overload Protection
		50/60 Hz	40 - 1KHz	
60V	10mV	$\pm 1.5\% \pm 5\text{dpts}$	$\pm 2.0\% \pm 5\text{dpts}$	AC 600V
600V	100mV			

ACV Peak MAX $\pm 850\text{V}$ Accuracy + additional $\pm 2\% \pm 50\text{dpts}$

LPF @1KHz -3db

Continuity (Open voltage 0.4V, Overload protection AC 600V)

Range	Resolution	Accuracy	Beeping
600 Ω	0.1 Ω	$\pm 1.0\% \pm 2\text{dpts}$	<30.0 Ω (approx.)

Resistance (Ω) (Open voltage 0.4V)

Range	Resolution	Accuracy	Overload Protection
600 Ω	0.1 Ω	$\pm 1.5\% \pm 2\text{dpts}$	AC 600V
6K Ω	1 Ω		
60K Ω	10 Ω		
600K Ω	100 Ω		

Frequency (Auto range)

Range (Hz)	Resolution (Hz)	Accuracy	Sensitivity	Overload Protection
4-99.99	0.01	$\pm 0.5\% \pm 0.02$	V: 3V/10V A: 1A/5A	AC 600V
100.0-999.9	0.1	$\pm 0.5\% \pm 0.2$	V: 2V/10V A: 1A/5A	
1.000K-9.999K	10	$\pm 0.5\% \pm 20$		
10.00K-99.99K	1.2K	$\pm 0.5\% \pm 2.4K$		
100.0K-200.0K	5K	$\pm 0.5\% \pm 10K$		AC400A

Temperature (for using K-Type thermocouples, $^{\circ}\text{C}$ or $^{\circ}\text{F}$)

Range	Resolution	Accuracy	Overload Protection
-40 – 0 $^{\circ}\text{C}$	0.1 $^{\circ}\text{C}$	$\pm 2.0\% \pm 2^{\circ}\text{C}$	AC 300V
0 – 400 $^{\circ}\text{C}$	0.1 $^{\circ}\text{C}$	$\pm 0.5\% \pm 2^{\circ}\text{C}$	
-40 – 32 $^{\circ}\text{F}$	0.1 $^{\circ}\text{F}$	$\pm 2\% \pm 3.6^{\circ}\text{F}$	
32 – 752 $^{\circ}\text{F}$	0.1 $^{\circ}\text{F}$	$\pm 0.5\% \pm 3.6^{\circ}\text{F}$	

Diode Test

Range	Resolution	Accuracy	Overload Protection
0 – 1.999V	0.001V	$\pm 2.5\% \pm 5\text{dpts}$	AC 600V

+982165565901

+982144584619

+989034119385

پتروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR



Capacitance

Range	Resolution	Accuracy	Overload Protection
600nF	0.1nF	$\pm 2.0\% \pm 0.2 \text{ nF}$	AC 600V
6 μ F	1nF	$\pm 2.0\% \pm 0.02 \mu \text{ F}$	
60 μ F	10nF	$\pm 2.0\% \pm 0.02 \mu \text{ F}$	
600 μ F	100nF	$\pm 2.0\% \pm 0.2 \mu \text{ F}$	
6000 μ F	1 μ F	$\pm 2.5\% \pm 5 \mu \text{ F}$	

General Specifications: Indoor Use

Conductor Size:	25mm max. (approx.)
Battery Type:	two 1.5V SUM-3
Display:	6000 counts
Range Selection:	Auto and Manual
Overload Indication:	OL
Power Consumption:	17 mA (approx.)
Low battery Indication:	<input type="checkbox"/> B
Sampling Time:	2 times/sec.
Auto-power-off:	30 minutes
Operating Temperature:	0°C to 50°C
Operating Humidity:	less than 85% relative
Altitude:	up to 2000M
Storage Temperature:	-20°C to 60°C
Storage Humidity:	less than 75% relative
Dimension:	190mm (L) x 66mm (W) x 36mm (H) 7.5" (L) x 2.6" (W) x 1.45" (H)
Weight:	250g (battery included)
Accessories:	Carrying bag x 1 Users manual x 1 1.5V battery x 2 Test leads x 1 K-type thermocouples x 1 Adaptor (for Capacitance and K-type thermocouples) x 1

+982165565901

+982144584619

+989034119385

پتروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR