


O | OTEX



پتروفرهان گستر جنوب

Tehran, Tehransar

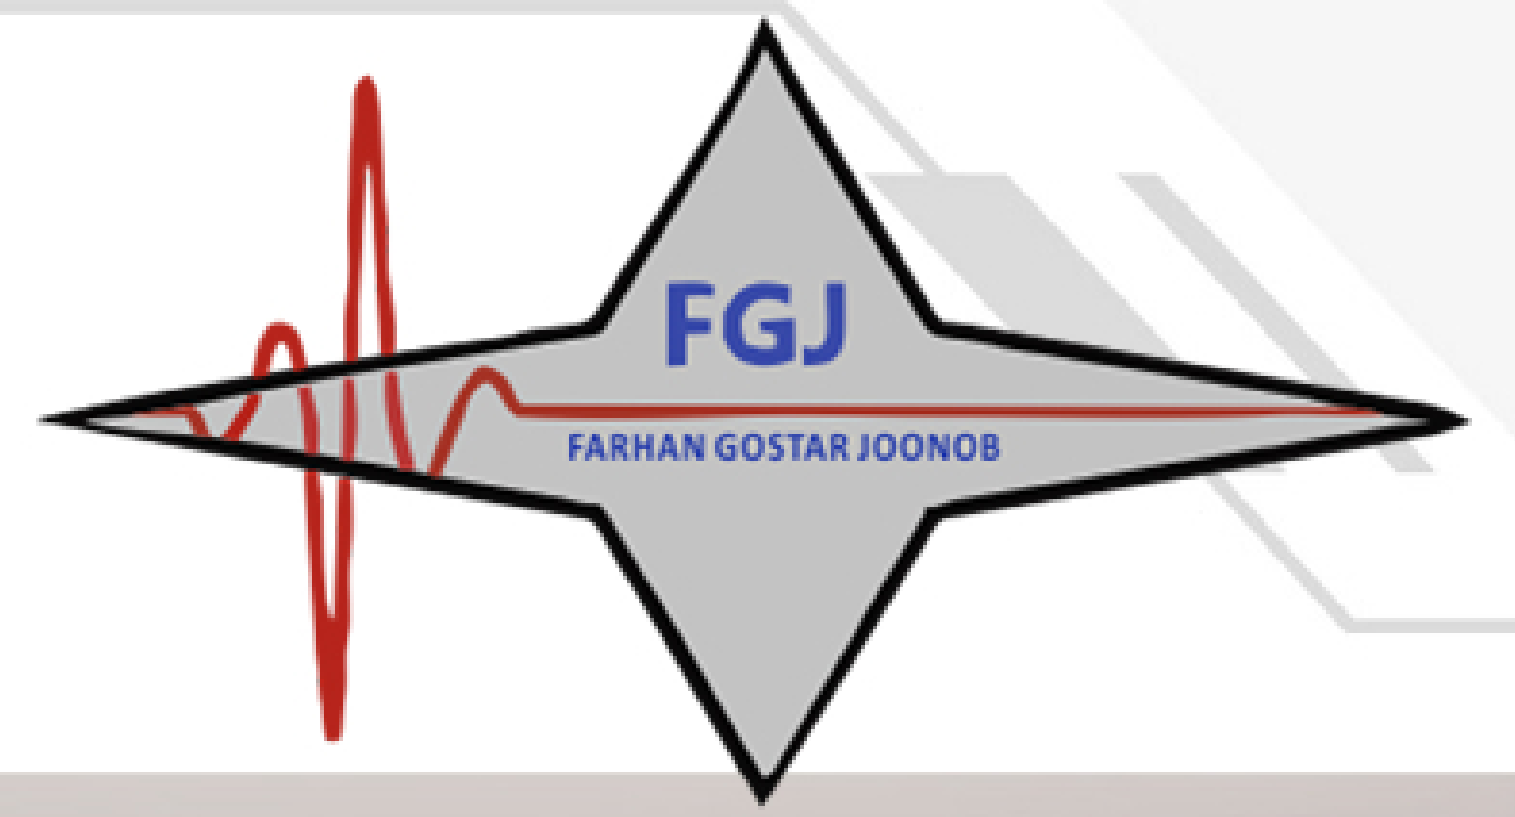

OT 60DL

Ultrasonic Thickness gauge

+982165565901

+982144584619

+989034119385


پتروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR

The OT 60DL is a Multi-Mode Ultrasonic Thickness Gauge with resolution as high as .0.001mm

The multi-mode feature of the OT 60DL allows the user to toggle between Pulse-Echo (Pit & Flaw) mode and Echo-Echo (through (paint/coating

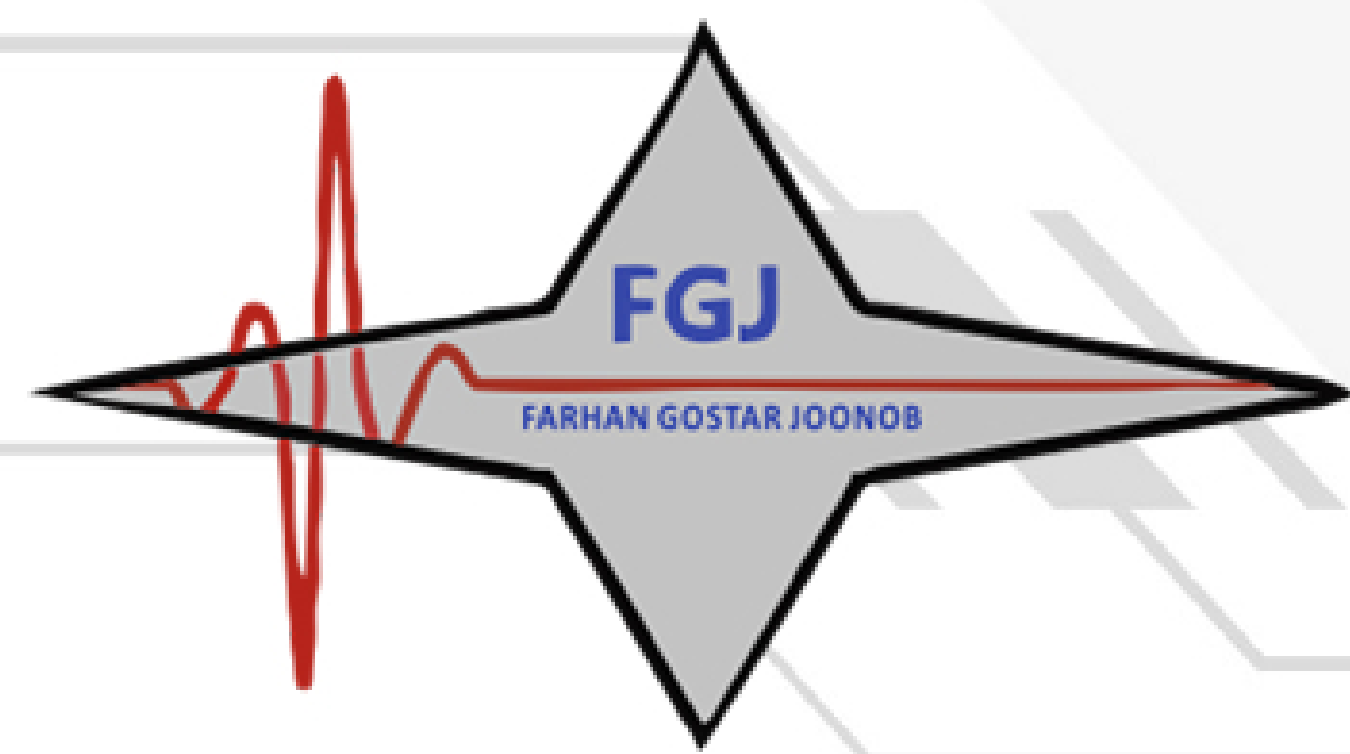

Product specifications:

- Color TFT display (320x240 TFT LCD) with adjustable backlight
- Ignores coatings up to 1200 microns in Echo-Echo mode
- Measures thickness of material up to 600 mm in Pulse-Echo mode (for Steel)
- Probe zero function / Easy and fast calibration
- Sound velocity range : 1000 ~ 9999 m/s
- Resolution: 0.1 / 0.01 / 0.001 (Selectable)
- Accuracy: \pm (0.5% thickness + 0.01) mm, depends on materials and conditions
- Metric/imperial unit selectable
- Communication: USB 2.0 & Bluetooth support
- Capability of Single point and Scan mode measurement
- Memory for 100 files (Up to 100 values for each file) of stored values
- Upper and lower limit can be pre-set (with Auto-alarm function)
- Outline dimensions: 150mm x 76 mm x 38mm
- Weight: 295 grams

+982165565901

+982144584619

+989034119385

پتروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR