


OTEX



پتروفرهان گستر جنوب

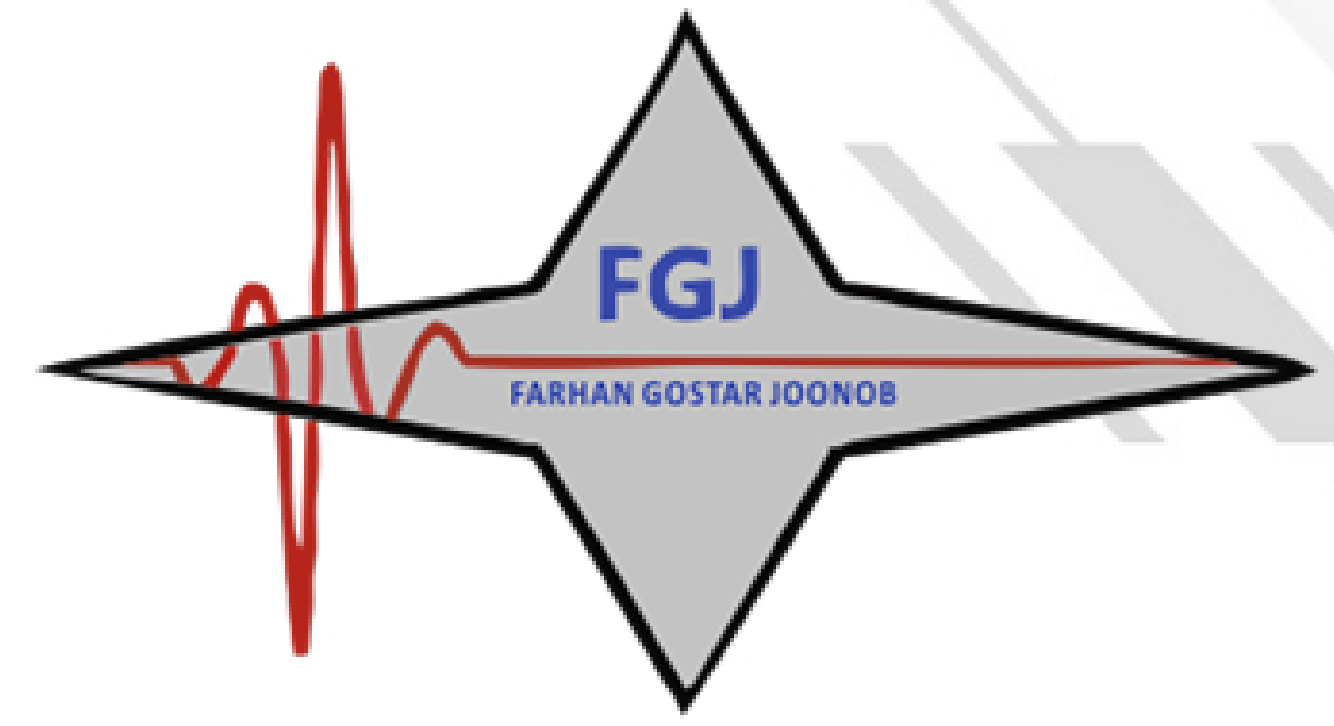

پتروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR

+982165565901

+982144584619

+989034119385

OTP 30

Ultrasonic Thickness gauge

The OTP 30 is a low-cost Ultrasonic Thickness Gauge combining ease of use with advanced features and capabilities. Resolution of 0.01mm allows accurate measurement of thin sections, and the gauge retains last calibration after switch-off

Product specifications:

- 4.5 digits LCD with EL backlight
- Measures thickness of material up to 600 mm in Pulse-Echo mode (for Steel)
- Probe zero function / Easy and fast calibration
- Sound velocity range : 1000 ~ 9999 m/s
- Resolution: 0.1 / 0.01 mm (selectable)
- Accuracy: \pm (0.5% thickness + 0.01) mm, depends on materials and conditions
- Metric/imperial unit selectable
- Communication: USB 1.1
- Capability of Single point and Scan mode measurement (7 readings per second for Single point measurement and 16 reading per second for Scan mode)
- Memory for 20 files (Up to 99 values for each file) of stored values
- Outline dimensions: 150mm x 74 mm x 32mm
- Weight: 245 grams



+982165565901

+982144584619

+989034119385

پتروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR