


پتروفرهان گستر جنوب



calibration block
(optional)

- According to ISO868, ISO7619, ASTM D 2240
- With peak value indicator
- Optional accessory:
test stand ISH-STAC and ISH-STD

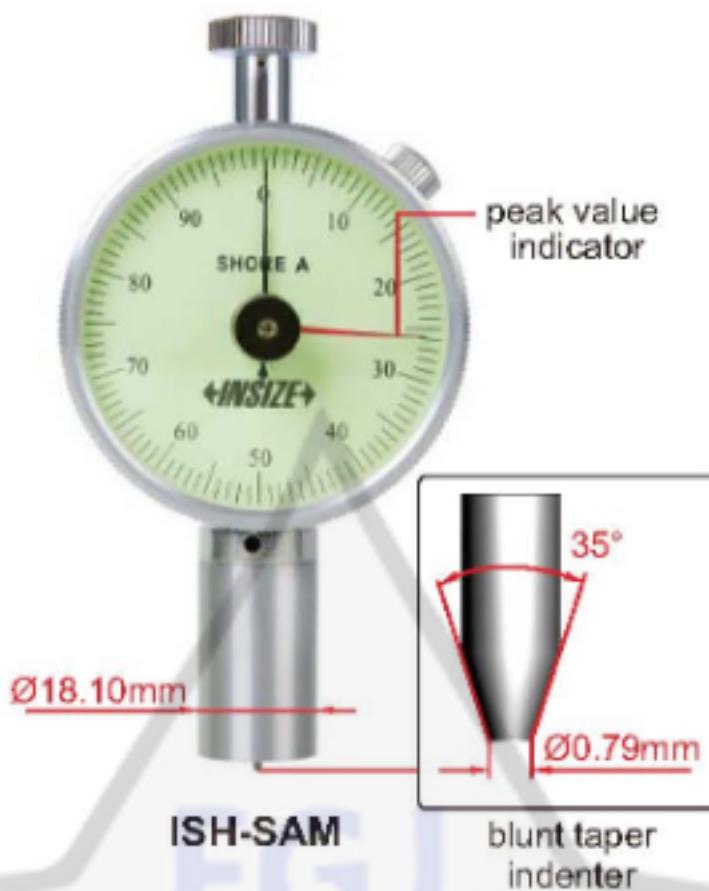

SPECIFICATION

Code	ISH-SAM	ISH-SDM
Scale	Shore A	Shore D
Application	nature rubber, soft elastomer, etc.	hard rubber, plastic, hard elastomer, etc.
Measuring range*	10~90HA	20~90HD
Graduation	1HA	1HD
Indenter protrusion	2.5mm	
Dimension	115×60×25mm	
Weight	160g	



* Use ISH-SDM when measuring result is higher than 90HA
Use ISH-SAM when measuring result is lower than 20HD

OPTIONAL ACCESSORY

Calibration block	ISH-DS-BLOCK
-------------------	--------------

+98 21 65565901

+98 21 44584619

+98 90 34119385

پتروفرهان گستر جنوب

FGJ-NDT.IR
DIGINDT.IR