



# TEMP. ( type K ) TRANSMITTER

Model : TR-TMK1A4

ISO-9001, CE, IEC1010



Temp. probe  
Optional



LUTRON ELECTRONIC



The Art of Measurement

+982165565901


+982144584619

+989034119385

پتروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR

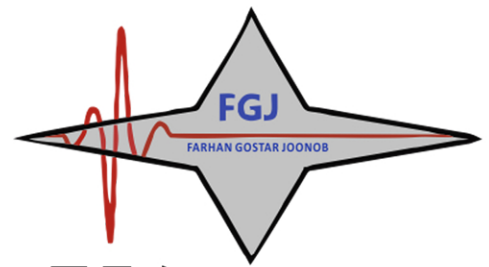

# Temperature ( type K )

# TRANSMITTER

Model : TR-TMK1A4-500C

Model : TR-TMK1A4-100C

<b>Measure</b>	TR-TMK1A4-500C	TR-TMK1A4-100C
<b>Range</b>	0 to 500 °C	0 to 100 °C
<b>Output</b>	4 - 20 mA	
	TR-TMK1A4-500C	TR-TMK1A4-100C
	0 °C = 4 mA	0 °C = 4 mA
	250 °C = 12 mA	50 °C = 12 mA
	500 °C = 20 mA	100 °C = 20 mA
<b>External Adjustment</b>	ZERO VR SPAN VR	
<b>Power Supply</b>	90 - 260 ACV 50 Hz/60 Hz	
<b>Operation Temperature</b>	0 - 50 °C 32 - 122 °F	
<b>Operation Humidity</b>	Less than 80 %RH	
<b>Accessory Included</b>	Type K temperature probe is optional.	
<b>Optional Accessories</b>	Type K temperature probe : TP-01 TP-02A TP-03 TP-04	
<b>Mounting</b>	Din rail or Wall	
<b>Case</b>	ABS plastic	
<b>Others</b>	Type K standard input socket	

\* Appearance and specifications listed in this brochure are subject to change without notice.

+982165565901

+982144584619

+989034119385

پتروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR