


پتروفرهان گستر جنوب

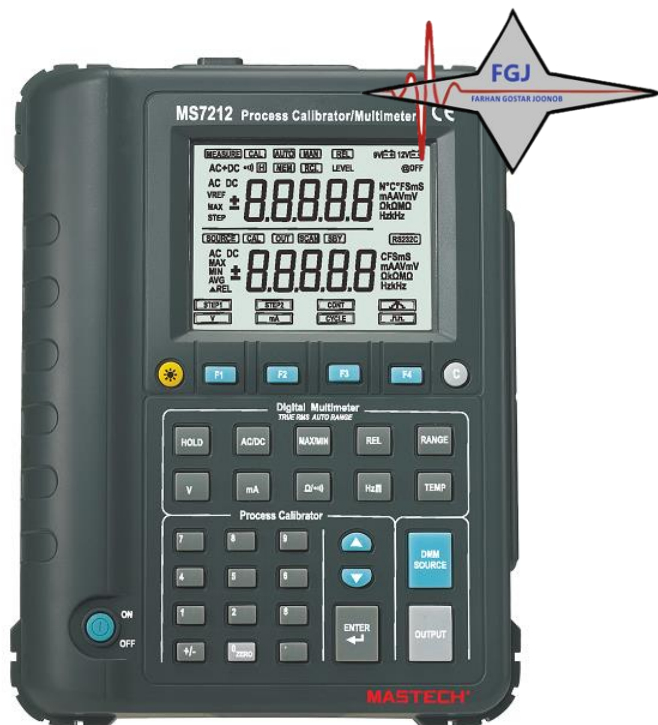

پتروفرهان گستر جنوب

FGJ-NDT.IR

DIGINDT.IR

+982165565901

+982144584619

+989034119385

Specifications

MS7212

Multimeter Functions	Range	Accuracy
DC Voltage	400mV/4V/40V/300V	$\pm(0.025\%+5)$
AC Voltage	400mV/4V/40V/300V	$\pm(0.8\%+10)$
DC Current	400mA	$\pm(0.1\%+10)$
AC Current	400mA	$\pm(0.7\%+10)$
Resistance	400 Ω /4K Ω /40K Ω /400K Ω	$\pm(0.1\%+10)$
Frequency	4Hz~99.99Hz	± 0.05 Hz
	100Hz~5kHz	± 0.5 Hz
	5kHz~30kHz	± 2 Hz
Temperature($^{\circ}$ C)	-50 $^{\circ}$ C~1300 $^{\circ}$ C	$\pm(0.3\%+1^{\circ}$ C)
Source Output	Range	Accuracy
DC Voltage Output	100mV/5V/15V	$\pm 0.025\%$
DC Current Output	25mA	$\pm 0.02\%$
Frequency Output	20Hz~ 5000Hz	$\pm 0.02\%$
Features		
Data Logging	40000 counts	
Auto Ranging	●	
Manual Ranging	●	
Relative Measurement	●	
Continuity Buzzer	<50 Ω	
MAX/MIN	●	
Display Backlight	●	
Data Hold	●	
USB Interface	Windows OS	
General		
Power Supply	1x9V Battery & 8x1.5V AA Batteries	
Product Size	224mmx172mmx58mm/8.8"x6.77"x2.28"	
Product Weight	1060g/2.32lb	
Safety Rating	CE CAT.II 600V	